




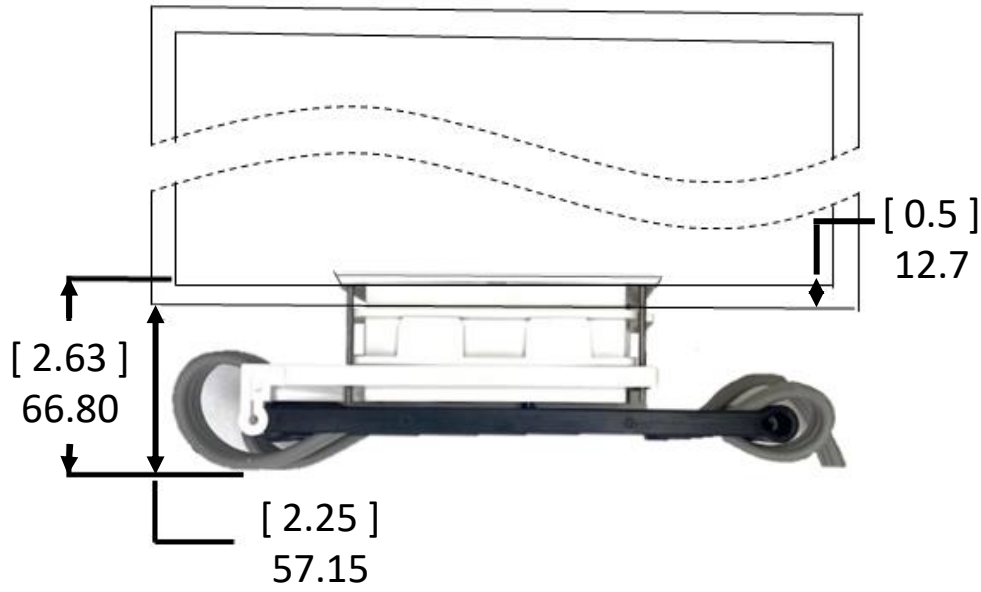

Low Profile Outlet Adjusts to Firmly Fit 7/16" thru 11/16" Drawer Boxes

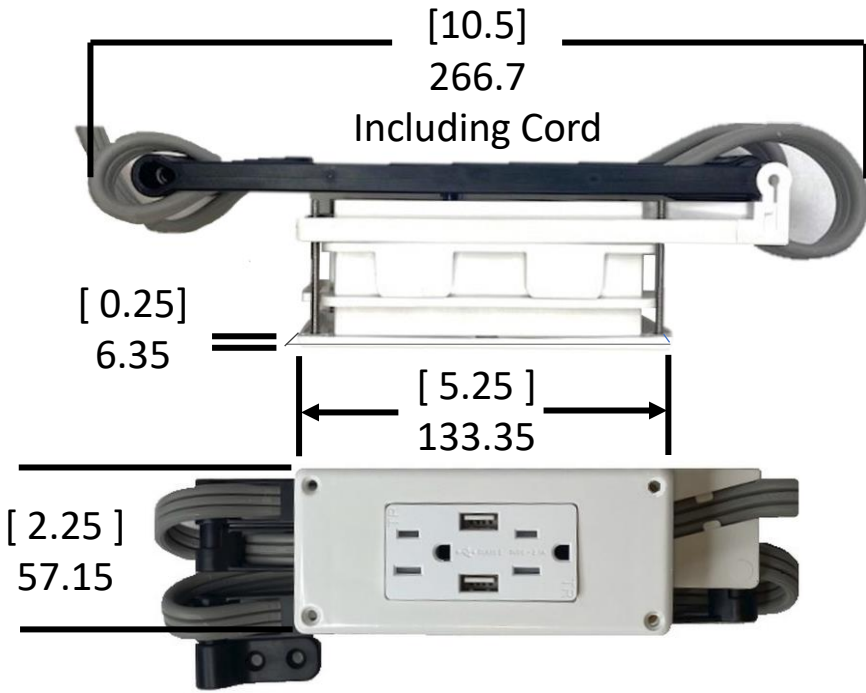

Dual USB-A Charger with 15A Duplex Tamper Resistant Receptacles

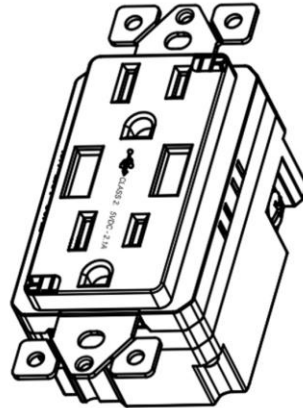

◆ SPECIFICATION

Receptacle Rating.....	15 Amp, 125VAC
USB Rating.....	Two USB ports with total 2.1 Amp, 5VDC
Wire Terminals.....	#14-#12 AWG
Operating Temperature.....	14 to 104°F (-10 to 40°C)
USB Compatibility.....	USB 1.1/2.0/3.0 devices, including Apple products
Strip Length.....	0.5inch (back wire holes) , 1inch (screw terminal)

◆ FEATURES

- 2 USB ports with a super high-current power of 2.1 Amp, 5VDC
- Charge most compatible electrical device directly without an adapter
- Tamper-Resistant Shutters provide compliance with 2011 NEC Code
- Replace a standard duplex receptacle
- Back and side wire for easy installation
- UL Listed and FCC Approved.